


NPEXA-C21
NPEXA-C211



Parameters

- Ø 20_ per line (RTD)
- Ø 550_
- Ø 500ms
- Ø 3000V AC (intrinsically safe side /
- Ø 1500V AC (Power supply /non-intrinsically
- Ø 100M_ (Input /Output/Power supply)

Wiring diagram

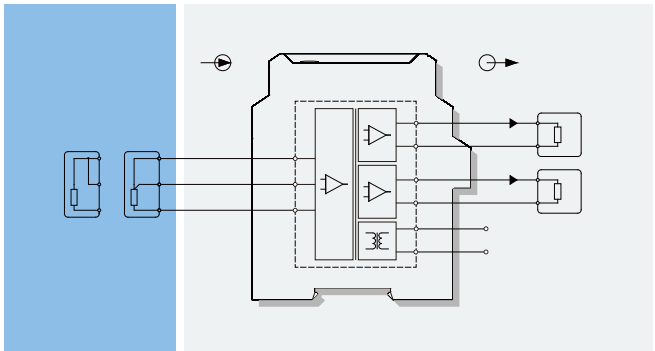

Explosive-proof parameters

- : Co=5>F,
- : Co=49>F,

Model rules